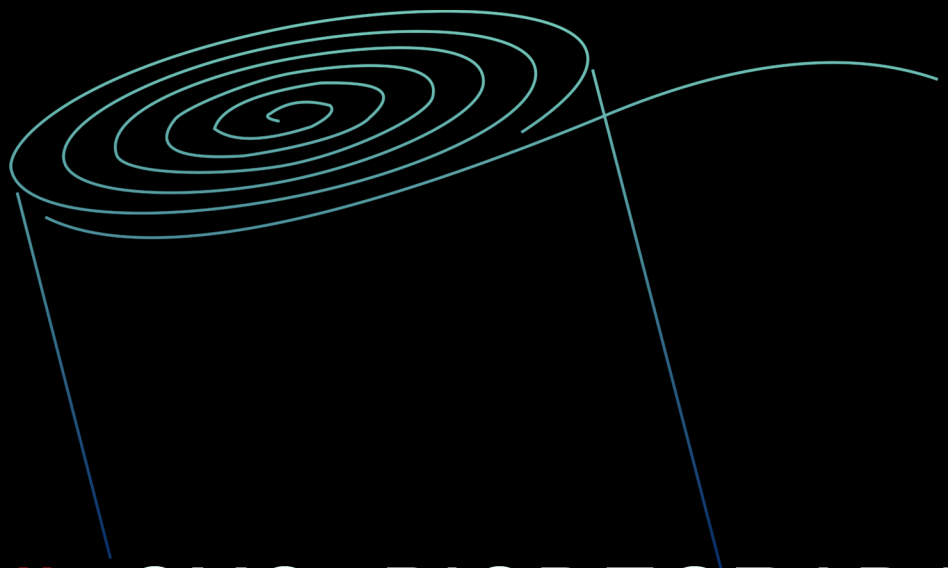


SHREEJI OXO-BIODEGRADABLE

Core Extension, Lowest Case Cost, Ultra-Light Weight, High Load-Holding Capabilities

Oxo Bio-Degradable is Shreeji Stretch Film's newest, premium grade stretch film made with special orientation that produces stronger film at thinner gauges. Core extensions and ultra-light weight rolls make Oxo-BioDegradable easy to handle and reduce wrapper fatigue. Engineered to outperform all competitive hand films—regardless of gauge Oxo Bio-Degradadable has reinforced edges to provide unrivaled load-holding force and tear resistance. Oxo Bio-Degradable's aggressive cling package is strong enough for B and many C loads. Low case prices and on-the-load cost make Oxo-Biodegradable eco-nomical. And, using less film per load makes Oxo-Biodegradable—eco-friendly!

SHREEJI OXO-BIODEGRADABLE
Applications Include:
Cold Environments
Grocery Warehouses
Internal Wrapping
Boxed Products
Food Processors
All Load Profiles

Shreeji Stretch Film Industries

SHREEJI OXO-BIODEGRADABLE

Film Width	Roll Length	Micron	Weight Cost/Roll	Cases/Pallet	Product Number
400mm"	450m	10	6.59/Kg/ctn	48	HPE1615eco

Shreeji Stretch Film Industies produces the most reliable and consistent stretch films available in North America. Our four regional plants in the UnitedStates along with our facility in Canada represent the most modern and sophisticated fleet of extrusion equipment in the stretch film industry. Each plant has been designed from the ground-up specifically to produce premium stretch film products. Shreeji Stretch Film offers the most complete range of both blown and cast,machine and hand films to fit your every need. Shreeji Stretch Film — the simple solution for all your stretch film needs

How to Apply Oxo-Biodegradable Film

1. Tuck the end of the film between the boxes or tie to the skid. With the hand closest to the skidon top of the roll and the other hand on the bottom, walk forward with the film unwinding next to the load. Always hold the roll straight up and down—perpendicular to the floor and parallel to the load.

2. Let the roll unwind easily as you move alongside the load until you are about 6 inches from the corner.

3. Stop. While holding the roll firmly,stretch the film beyond the corner to the maximum tension—then wrap the film around the corner. Repeat this process on all sides while overlapping each layer 1" to 3" in a spiral motion. Once the load is completely and securely wrapped, break off the film 12" past the corner and wipe it down.

Film Selector Worksheet

Current Film Used:

Load Information:

Product: _____ Brand: _____

Load Profile: _____ Type: _____

Height: _____ Gauge: _____

Width: _____

Length: _____

Weight: _____

Shreeji Stretch Film Industries

93, G.I.D.C. Estate, Vitthal Udyognagar - 388121, Dist:
Anand (Gujarat) INDIA

Email : info@shreejistretchfilm.com
Web:www.shreejistretchfilm.com